


20 - 25 lb. Rigid Mount Washer-Extractor 30010 G5E, 30010 G5X

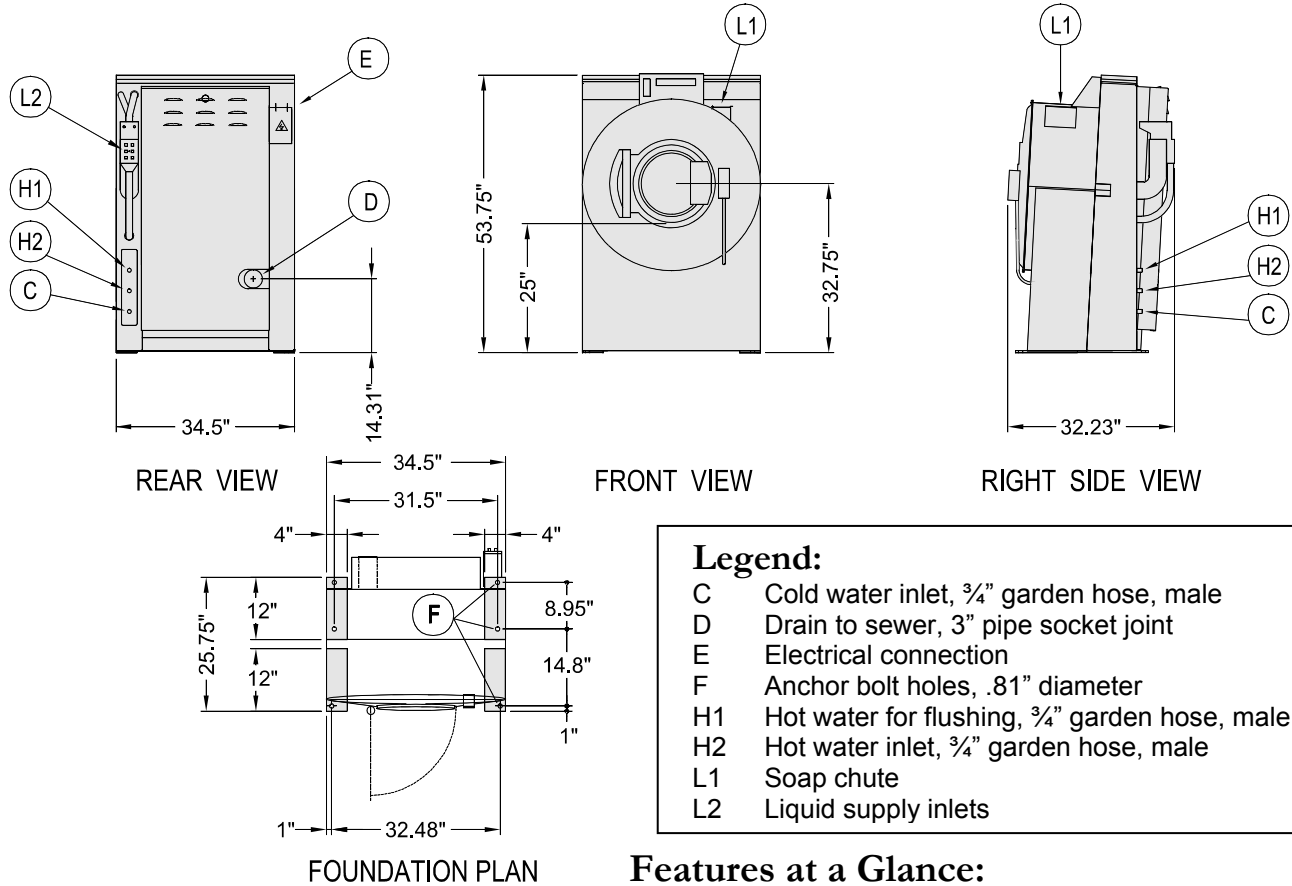

See dimensional drawing for fastening details.
 Consult Factory for foundation requirements

Specifications:

Maximum Capacity lbs (kg)	20 – 25 (9 – 11)
Wash Speed RPM	38
Distribution Speed RPM	64
High Speed Extract RPM	460
Final Extract G Forces	90
Approx. net weight lbs (kg)	500 (227)

Features at a Glance:

- Single motor inverter drive
- Electrically-operated valves
- Auto tension V-belt drive
- Choice of E-P Express (X controller – 30 programmable formulas) or E-P OneTouch (E controller – 4 formulas) microprocessors.
- Cylinder side sheets have large perforations
- High, perforated ribs within cylinder
- Liquid soap connectors standard
- Sealed Deep-Groove Ball Bearings
- Standard models fit through 36" door
- 5 year limited warranty on frame, cylinder, and shell

ELECTRICAL SPECIFICATIONS

Voltage	Running Amps	Phase	Frequency	Fuse (Amps)	Circuit Breaker (Amps)
208/240	4	1 or 3	60	FRN10	10
380	3	3	50	FRS5	5
380	3	3	60	FRS5	5
480	2	3	60	FRS5	5

See Fuse and Wire Size manual MAEFUSE1AE for safety information.

Pellerin Milnor Corporation, P.O. Box 400, Kenner, LA 70062 ph: 504-712-7656, fx: 504 468-3094

<http://www.milnor.com> e-mail: mktg@milnor.com